


Invasive and Non-Invasive Ventilator



Main Features

- Volume and Pressure Synchronised Intermittent Mandatory Ventilation (VSIMV, PSIMV)
- Continuous Positive Airway Pressure (CPAP)
- Supports Multiple Breath Types: Volume Control, Pressure Control and Pressure Support

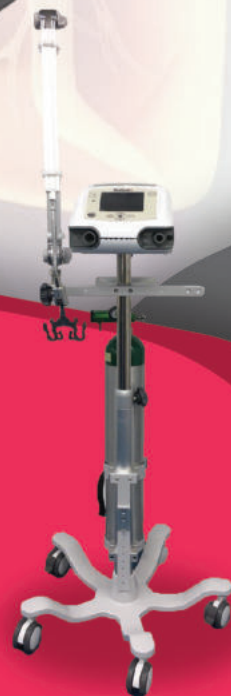

Indicative of use

- Sub-Acute Care, Acute Care and Home Care
- Adult and Pediatric Patients Requiring Invasive or Non-Invasive Support

Designed for convenience

- Compact, lightweight and quiet
- Bedside and portable use
- Easier user operation
- Lithium ion battery provides up to 11 hours of ventilation operation with real-time battery usage
- Automatic pre-use check of entire system before operating
- Equipped with internal Air Supply for area with no Medical Air Supply
- Ventilator parameters and alarm settings are linked to reduce the risk of clinically inappropriate settings

Applied Standards

- ISO 13485: 2016 Quality Management Standard for Medical Devices
- ISO 9001: 2018 Quality Management Standard
- IEC 60601 Series - Medical Electrical Equipment - General Requirements for Basic Safety and Essential Performance
- ISO 10993 Series - Biological Evaluation of Medical Devices
- ISO 80601-2-72:2015 Medical Electrical Equipment: Particular requirements for basic safety and essential performance of home healthcare environment ventilators for ventilator-dependent patients
- MDA:ACT 2012 (ACT 737)



SPECIFICATIONS

Weight	4.5 kg
Dimensions	23.5 cm x 31.5cm x 15.4cm
Noise	< 30 dBA at 1 m

ELECTRICAL CHARACTERISTICS

Power Supply	AC: 100-240V AC, 50/60HzOVAC
Power Usage	180 VA max
Internal Battery	Lithium ion, 25.2 V, 4.8 Ah

ENVIRONMENT

OPERATING

Temperature	+5° C to 40° C (-40° F to 104° F)
Humidity	10% to 95% RH
Atmospheric pressure	8.7 psi to 16.0 psi (600 hPa to 1100 hPa)
Oxygen Supply, LPO (Low Pressure O2 Supply)	0-15LPM @ 7 psi
Air Supply	Turbine Driven

STORAGE

Temperature	-40° C to +70° C (-40° F to 158° F)
Humidity	10% to 95% RH
Atmospheric pressure	7.2 psi to 15.4psi (500 hPa to 1060 hPa)
Alarms	Adjustable alarm sound level (65-85 dBA at 1 meter)

SETTING PARAMETERS

MODES

CPAP, PSV/ST, P A/C, V A/C, V SIMV, P SIMV

PERFORMANCE PARAMETER SPECIFICATIONS

Volume	50 to 2000 mL
Pressure	5 to 55mbar
Inspiratory time	0.3 to 2.4 s
Rate	1 to 60 b/min
Inspiratory Sensitivity	OP to 5
Exhalation Sensitivity	5 to 95%

MONITORED PARAMETER SPECIFICATIONS

Peak Inspiratory Pressure (PIP)	0 to 99 mbar
Positive End Expiratory Pressure (PEEP)	0 to 99 mbar
Inspiratory Tidal Volume (VTI)	0 to 9999 mL
Exhalation Tidal Volume (VTE)	0 to 9999 mL
Total Breath Rate (Rtot)	20 to 9999 mL
I:E Ratio (I:E)	0 to 99 bpm
Inspiratory Time (I Time)	9.9:1 to 1:9.9
Exhalation Time (E Time)	0 to 9.9 s
Inspiratory Minute Volume (Min V)	0 to 59.9 s
FI02	0 to 99.9 l
Leak	0 to 99%
Apnea Time	0 to 200 L/min
% Spontaneous (Spont)	0 to 999 s
	0 to 100%

PRODUCT OFFERINGS

DESCRIPTION	CATALOG
VenTech S1 portable ventilator	VS01000

ACCESSORIES

*Trolley (option)	MO2031
Oxygen inlet connector with Oxygen tube	MO1014
FI02 measurement kit	TO1008

DISPOSABLES

Air inlet combi filter	MO2031
Adult/Paediatric double-limb patient circuit with exhalation valve, 180cm PVC	TO1011
Adult/Paediatric single-limb patient circuit with exhalation valve, 180cm PVC	TO1010



Red Rose Technology is the Knowledge Division of Advance Pact Sdn Bhd (APSB).

APSB is a specialist biomedical engineering company, operating and maintaining a wide array of more than forty thousand biomedical equipment.

APSB Knowledge Division, Red Rose Technology is the research and innovation group that focuses on developing and producing high end biomedical equipment and components for the healthcare industry in Malaysia and beyond.

